


HIGH FREQUENCY APPLICATION.
VHF BAND AMPLIFIER APPLICATION.

FEATURES

- Good Linearity of f_T .

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CEO}	25	V
Emitter-Base Voltage	V_{EBO}	4	V
Collector Current	I_C	50	mA
Base Current	I_B	25	mA
Collector Power Dissipation	P_C	150	m
Junction Temperature	T	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

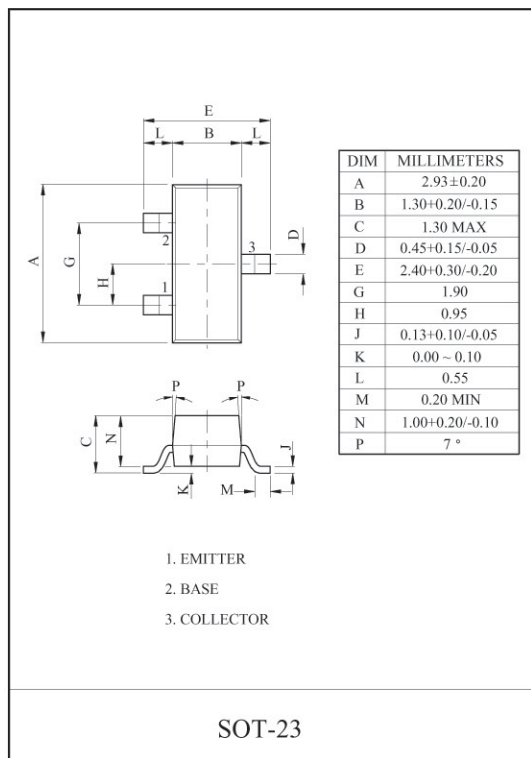







Marking



ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=30V$ $I_E=0$	-	-	0.1	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=3V$ $I_C=0$	-	-	0.1	μA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=10mA$	25	-	-	V
DC Current Gain		β_{FE}	$V_{CE}=10V$ $I_C=10mA$	20	70	200	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=15mA$ $I_B=1.5mA$	-	-	0.2	V
	Base-Emitter	$V_{BE(sat)}$		-	-	1.5	
Collector Output Capacitance		C_o	$V_{CB}=10V$ $I_E=0$ $f=1MH$	-	1.1	1.	pF
Collector-Base Time Constant		$C_C \cdot r$	$V_{CB}=10V$ $I_E=1mA$ $f=30MH$	-	-	25	pS
Transition Frequency		f_T	$V_{CE}=10V$ $I_C=10mA$	250	00	-	MH

KTC3881S

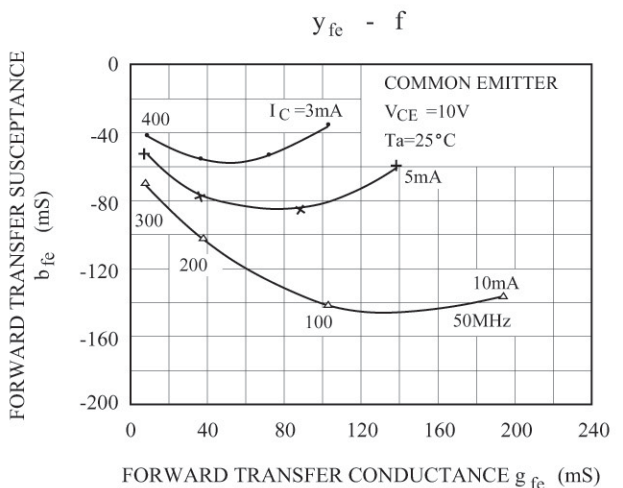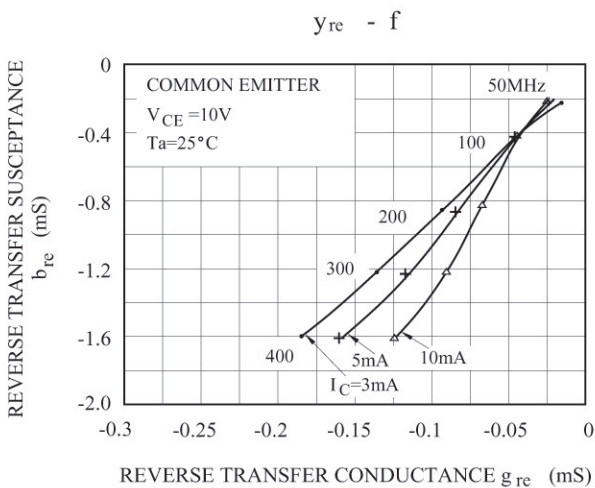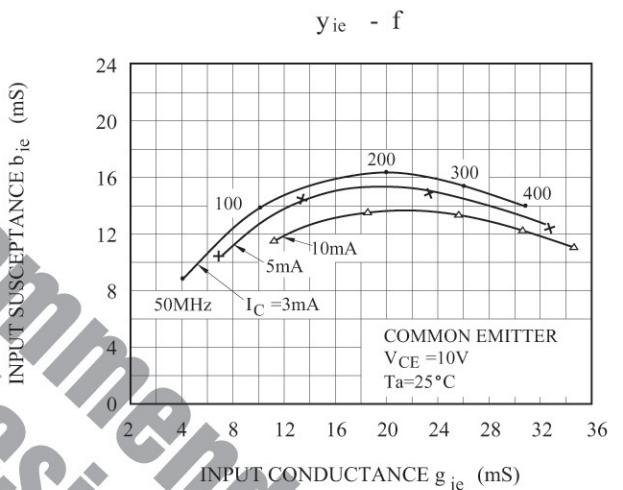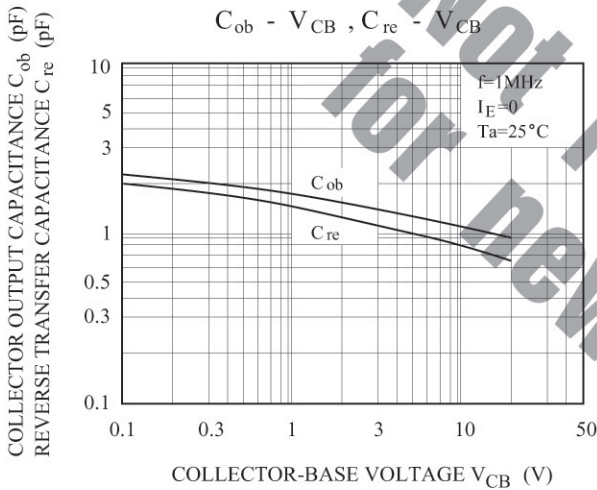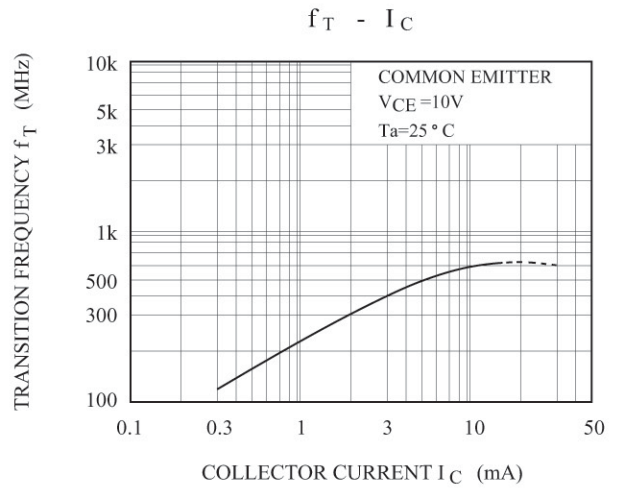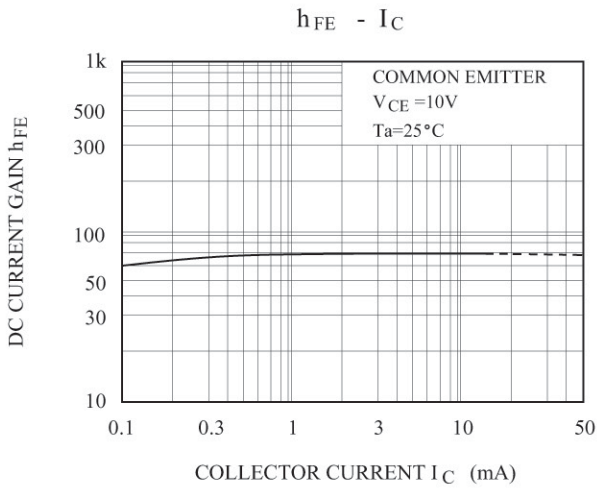

KTC3881S

