

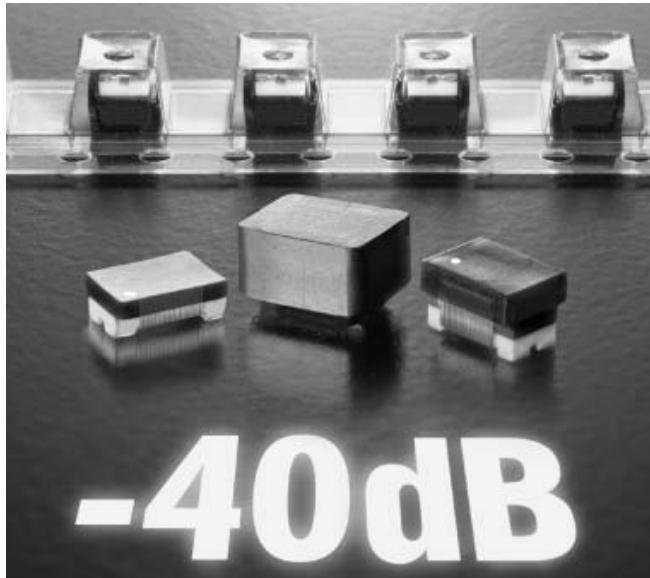
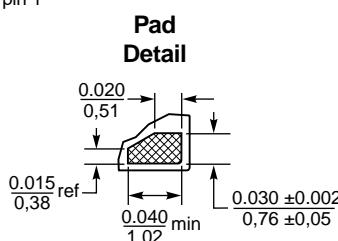



Common Mode EMI Filters - M2022 Series





M2022-A, M2022-ALP

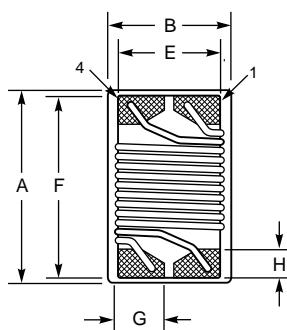

Recommended Land Pattern

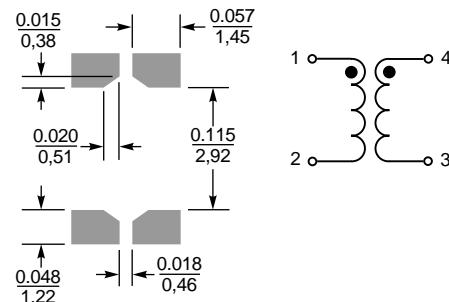

M2022-AS

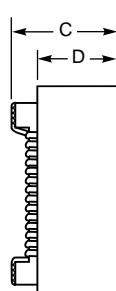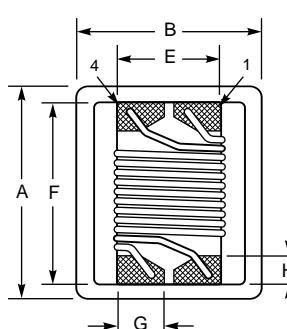

Parts/reel: 7" 600; 13" 2,200 Tape width: 12 mm
For packaging data see Tape and Reel Specifications section.

Dimensions

M2022-A

A max	B max	C max	D ref	E ref	F ref	G min	H
0.195	0.150	0.135	0.070	0.100	0.178	0.04	0.03
4,95	3,81	3,43	1,78	2,54	4,52	1,02	0,76

M2022-ALP

A max	B max	C max	D ref	E ref	F ref	G min	H
0.195	0.150	0.079	0.070	0.100	0.178	0.04	0.03
4,95	3,81	2,01	1,78	2,54	4,52	1,02	0,76





M2022-AS

A max	B max	C max	D ref	E ref	F ref	G min	H
0.231	0.196	0.150	0.107	0.100	0.178	0.04	0.03
5,87	4,98	3,81	2,72	2,54	4,52	1,02	0,76

Coilcraft®

Specifications subject to change without notice. Document 151-1 Revised 02/13/03

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469
E-mail info@coilcraft.com Web http://www.coilcraft.com

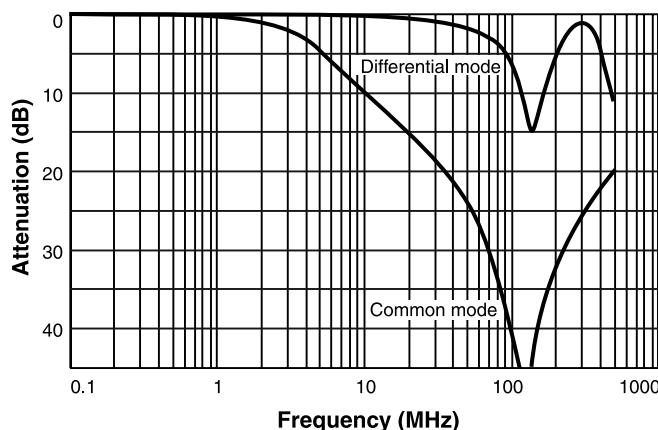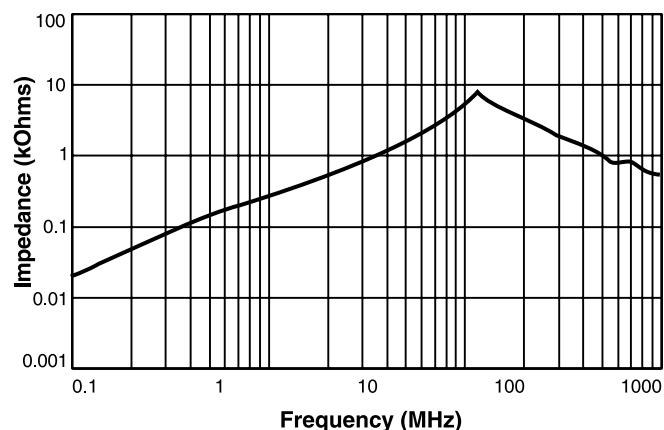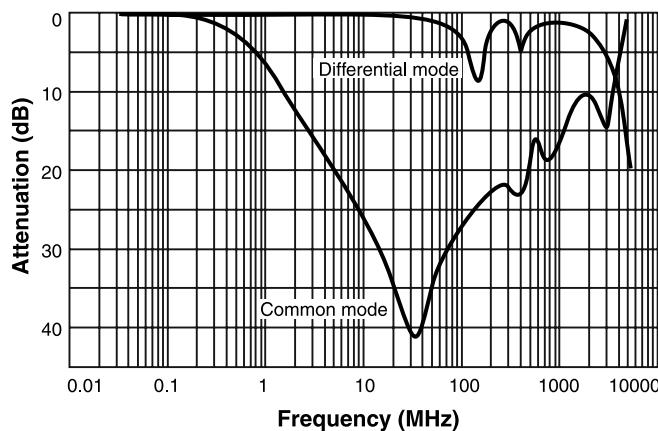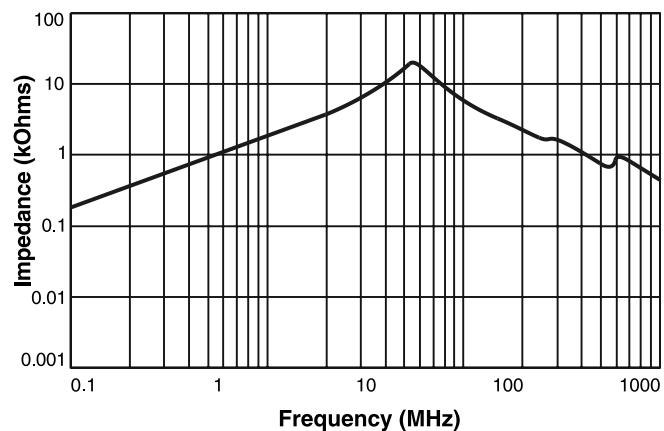M2022-A, M2022-ALP**Typical Attenuation*****Typical Impedance vs Frequency****M2022-AS****Typical Attenuation*****Typical Impedance vs Frequency**

*Measured on Agilent/HP8753D network analyzer

Coilcraft®

Specifications subject to change without notice. Document 151-2 Revised 10/30/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469
E-mail info@coilcraft.com Web http://www.coilcraft.com